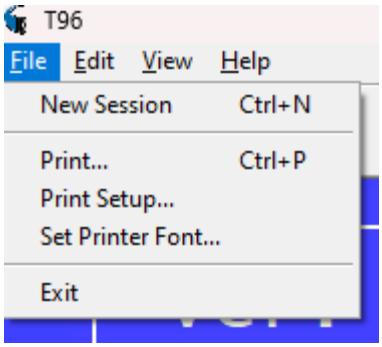
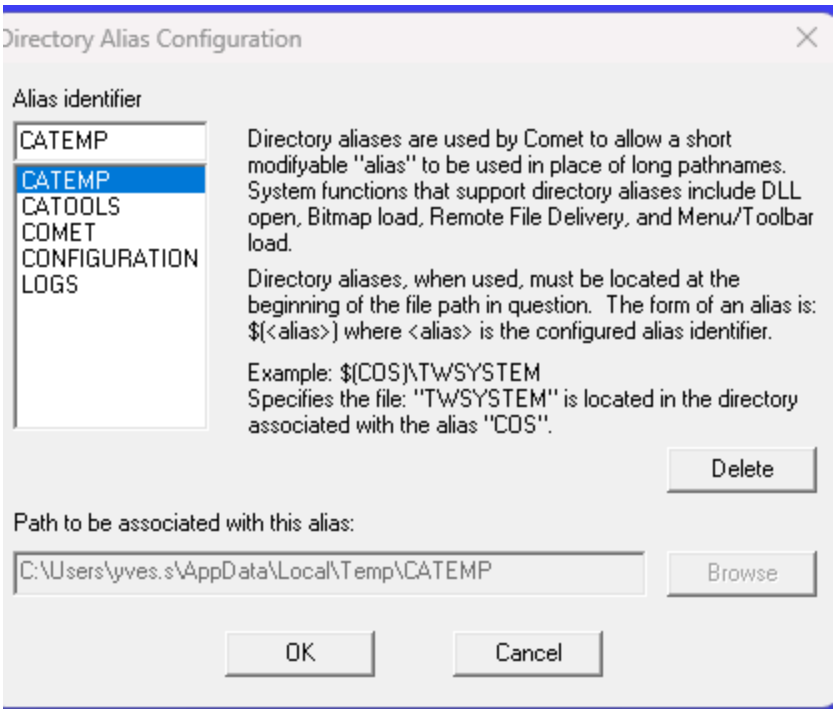
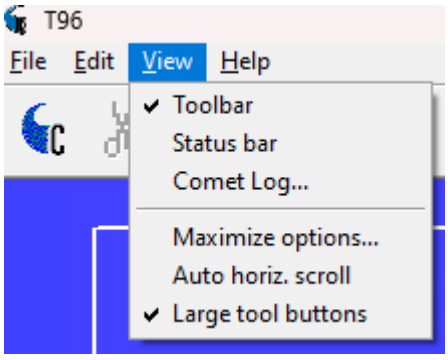
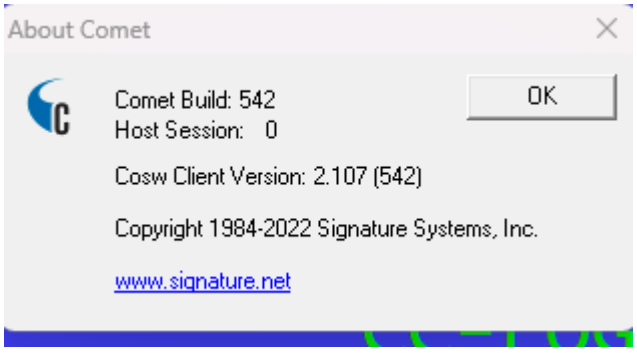

T96
File Edit View Help


T96
File Edit View Help
New Session Ctrl+N
Print... Ctrl+P
Print Setup...
Set Printer Font...
Exit


Directory Alias Configuration
Alias identifier
CATEMP
CATEMP
CATOOLS
COMET
CONFIGURATION
LOGS
Directory aliases are used by Comet to allow a short modifyable "alias" to be used in place of long pathnames. System functions that support directory aliases include DLL open, Bitmap load, Remote File Delivery, and Menu/Toolbar load.
Directory aliases, when used, must be located at the beginning of the file path in question. The form of an alias is: $(<alias>) where <alias> is the configured alias identifier.
Example: $(COS)\TWSYSTEM
Specifies the file: "TWSYSTEM" is located in the directory associated with the alias "COS".
Delete
Path to be associated with this alias:
C:\Users\yves.s\AppData\Local\Temp\CATEMP
Browse
OK
Cancel


T96
File Edit View Help
Toolbar
Status bar
Comet Log...
Maximize options...
Auto horiz. scroll
Large tool buttons


About Comet
Comet Build: 542
Host Session: 0
OK
Cosw Client Version: 2.107 (542)
Copyright 1984-2022 Signature Systems, Inc.
www.signature.net